


Our Free Skully Pillow Pattern offer has expired.

You can purchase the "[Skully](#)" [foundation \(paper\) piecing pattern](#) in PDF format in the [Twiddletails](#) store for only \$2.50 and use the free instructions below to make a pillow cover using that block or another 9" x 9" block of your choice.

16" x 16" Pillow Cover

with Bound Edge

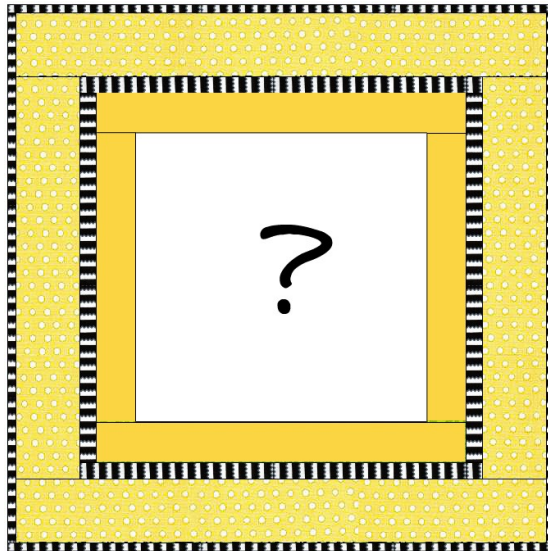

This pattern contains general instructions make a 16" x 16" pillow cover with a bound edge using a 9" x 9" (finished) quilt block of your choice.

Fabric Requirements

A 9 ½" x 9 ½" (unfinished) quilt block

¼ yd fabric A

1 Fat Quarter (18" x 22") fabric B

¼ yd fabric C

18" x 18" backing fabric

18" x 18" batting

½ yd fabric for an envelope style pillow back


A free  Twiddletails pattern
FABRIC PATTERNS & MORE

© 2014 twiddletails LLC


This pattern is intended for personal use only and is protected by copyright law. No portion of this pattern may be reproduced without written consent.

Pillow Cover Instructions


Fabric A



Fabric C




Fabric B



Cut fabric as follows:

Fabric	No. of Pieces	Size
A	2	1 $\frac{3}{4}$ " x 9 $\frac{1}{2}$ "
A	2	1 $\frac{3}{4}$ " x 12"
B	2	1" x 12"
B	2	1" x 13"
B	1	2 $\frac{1}{2}$ " x 80"
C	2	2 $\frac{1}{2}$ " x 13"
C	2	2 $\frac{1}{2}$ " x 17"

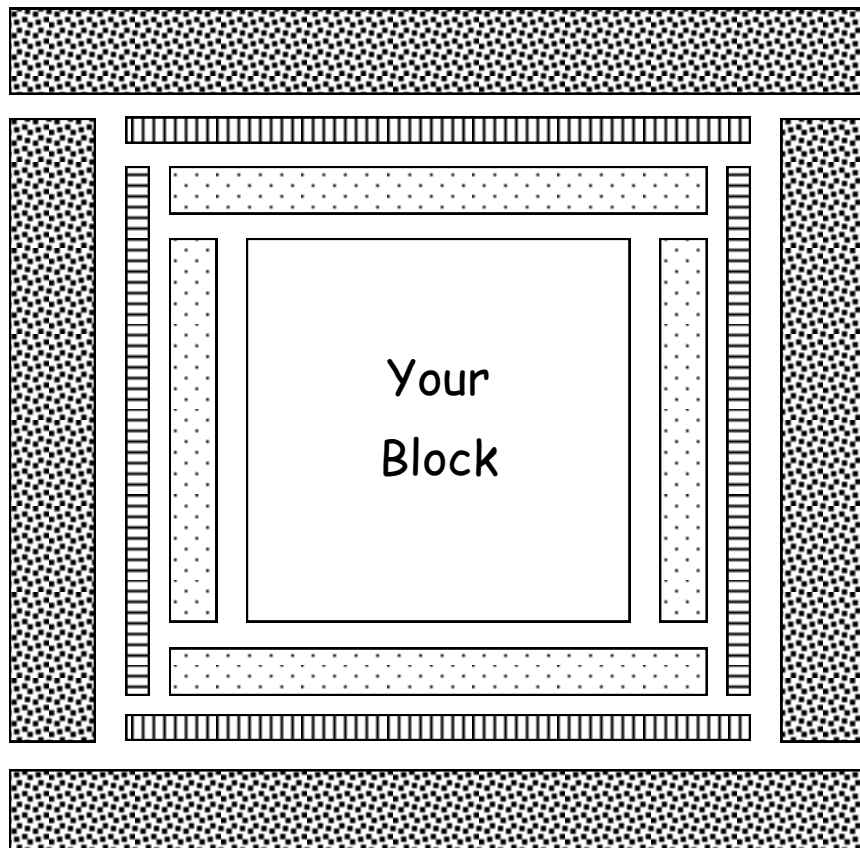

Assembly

1. Using your block as the center block, cut and attach the borders as shown in the diagram on page 3.
2. Layer & baste the pillow top and quilt as desired. Trim to 16½" x 16½".
2. Make 80" of binding using 2½" wide strips of Fabric B.
3. Out of pillow back fabric cut two sections 16½" x 12".
4. Fold over ⅜" along the long (16½") side of each section toward the wrong side of the fabric.
5. Repeat, folding the fabric over a second time.
6. Sew ⅛" from the outside edge to secure the seam.
7. Lay the quilted pillow front right side down on the table. Place one pillow back section right side up on top of it, lining up the raw edges. Pin into place.
8. Place the other pillow back section right side up on top, once again lining up the raw edges and overlapping the first section.
9. Machine baste along the edge using a ⅛" seam to secure all layers. (It can be a little wider as long as it's less than ¼" or you'll have to remove the basting afterwards.)
10. Attach the binding as you would on any other quilt.

Please do not hesitate to contact me if you encounter any problems or have questions.

Email: custserv@twiddletails.com

Be sure to visit the store for supplies and more free patterns.

www.twiddletails.com

